


MINERVA

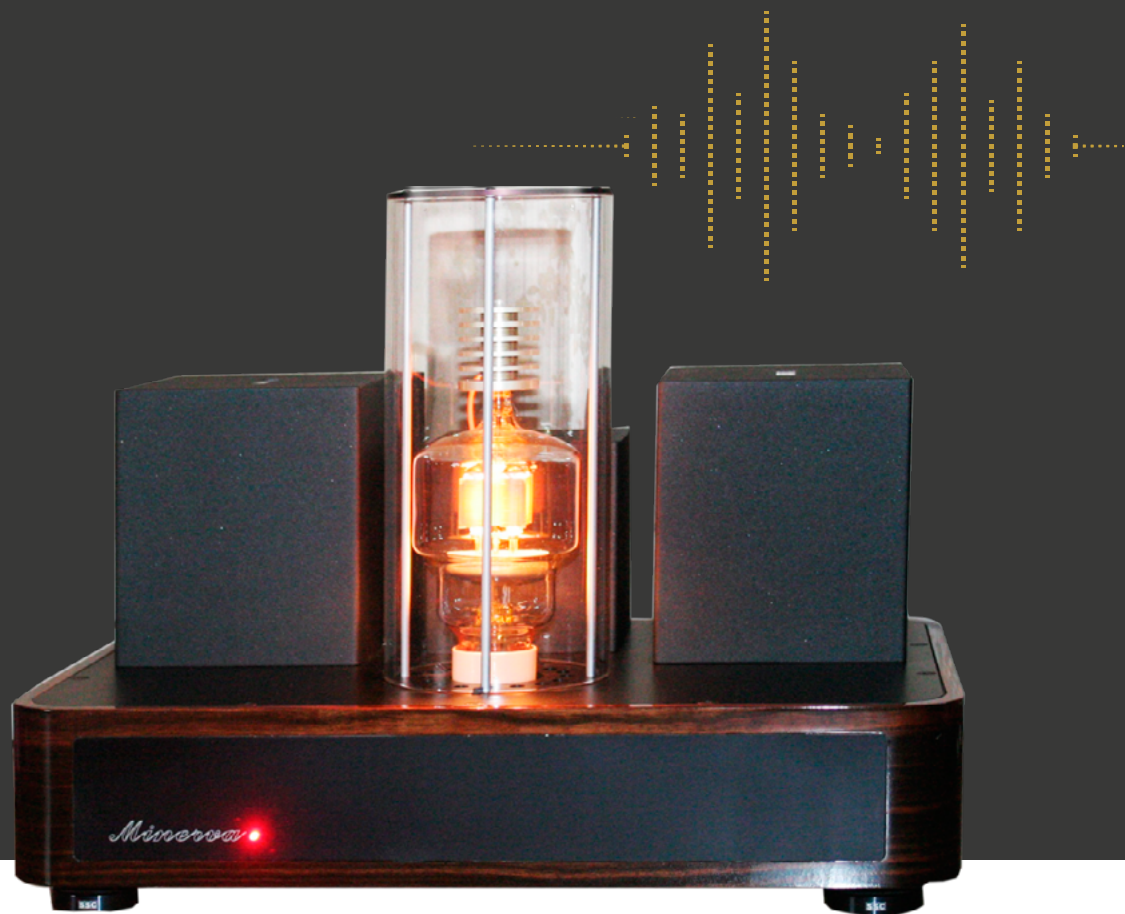

PARAMETER MINERVA

distortion factor at 1W, 10W, 50W and 1kHz and 4 ohms: 0.3%, 1%, 3%

Maximum continuous sine wave power at 4 ohms and $k=1\%$: 1x 50W

signal-to-noise ratio at 50mW: 86dB

signal-to-noise ratio at 10W: 95dB

channel separation right channel-left channel at 1kHz: 70dB

attenuation factor at 4 ohms: 15

frequency response: 30Hz (-0.1dB) - 60kHz (-3dB)

input impedance: 47kOhm

tube configuration: 1 x EIMAC 304TL

number of inputs: 1

Input sensitivity for full scale: 0.8V RMS

power consumption at idle: 450VA per monoblock

dimensions and weight: 470x320x190 mm; approx. 45kg per monoblock