


# MINERVA

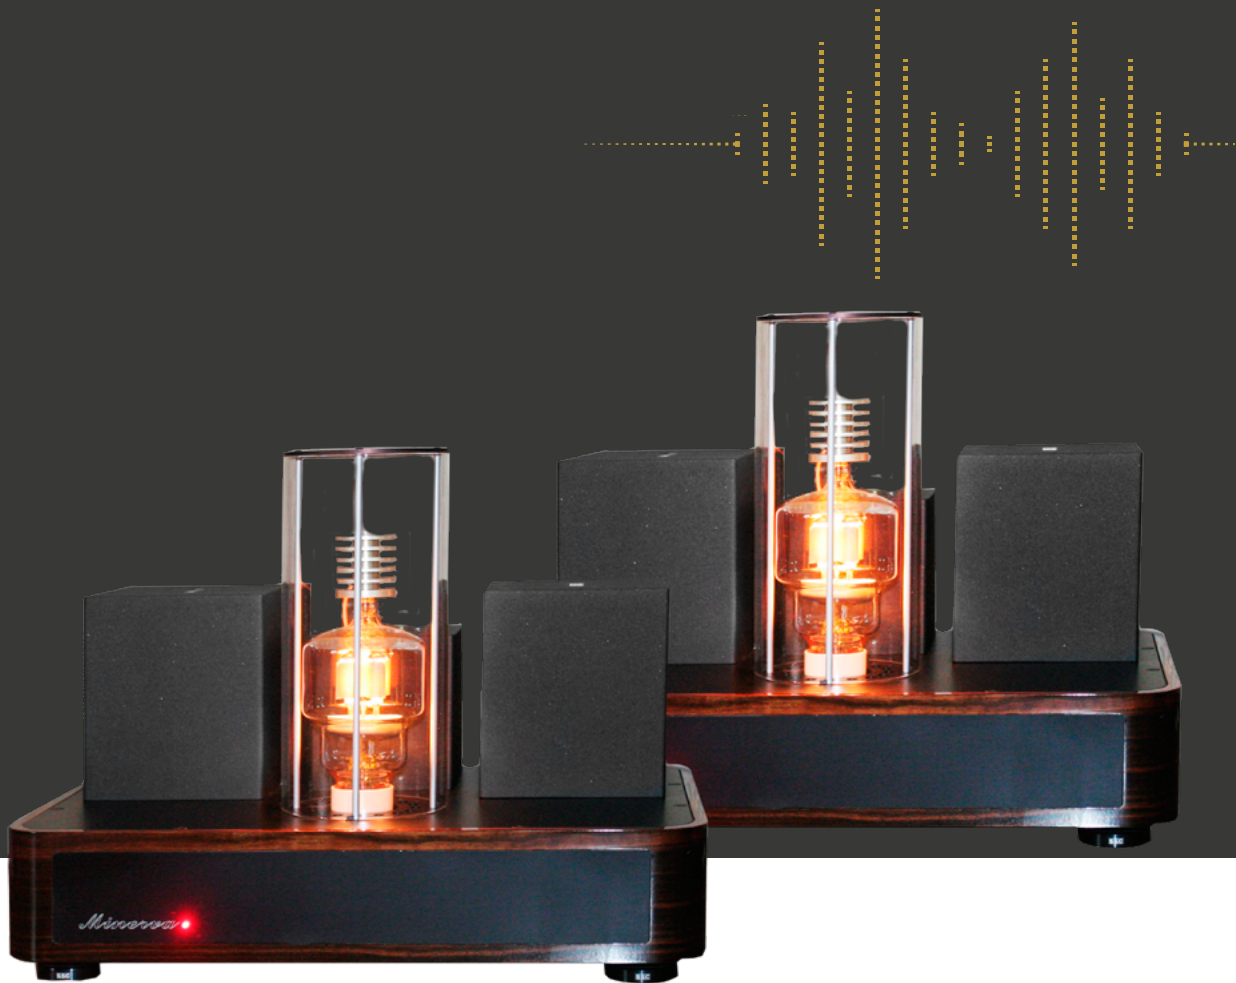

## PARAMETER MINERVA

**distortion factor** at 1W, 10W, 50W and 1kHz and 4 ohms: 0.3%, 1%, 3%

**Maximum continuous sine wave power** at 4 ohms and  $k=3\%$ : 1x 50W

**signal-to-noise ratio at 50mW**: 86dB

**signal-to-noise ratio at 10W**: 95dB

**attenuation factor at 4 ohms**: 15

**frequency response**: 30Hz (-0.1dB) - 60kHz (-3dB)

**input impedance**: 47kOhm

**tube configuration**: 1 x EIMAC 304TL

**number of inputs**: 1

**Input sensitivity for full scale**: 0.8V RMS

**power consumption at idle**: 450VA per monoblock

**dimensions and weight**: 470x320x400mm; approx. 45kg per monoblock