


GAIA

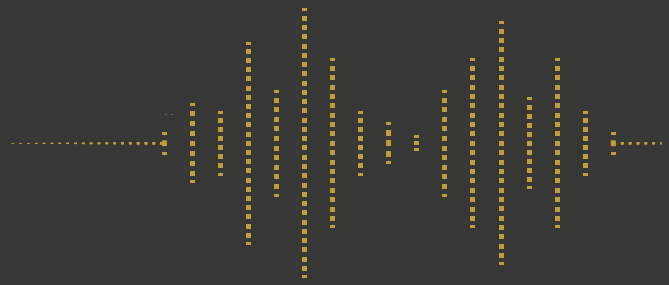

PARAMETER GAIA

distortion factor at 1W, 10W, 50W and 1kHz and and 4 ohms: 0.3%, 1%, 3%
maximum continuous sine power at 4 ohms and k=3%: 1x 50W
signal-to-noise ratio at 50mW: 86dB
signal-to-noise ratio at 10W: 95dB
attenuation factor at 4 ohms: 15
frequency response: 30Hz (-0.1dB) -60kHz (-3dB)

input impedance: 47kOhm
tube configuration: 1 x KR T1610
number of inputs: 1
Input sensitivity for full scale: 0.8V RMS
power consumption at idle: 450VA per monoblock
dimensions and weight: 470 x 320 x 470mm; approx. 45kg per monoblock