


AURORA 20 MK II

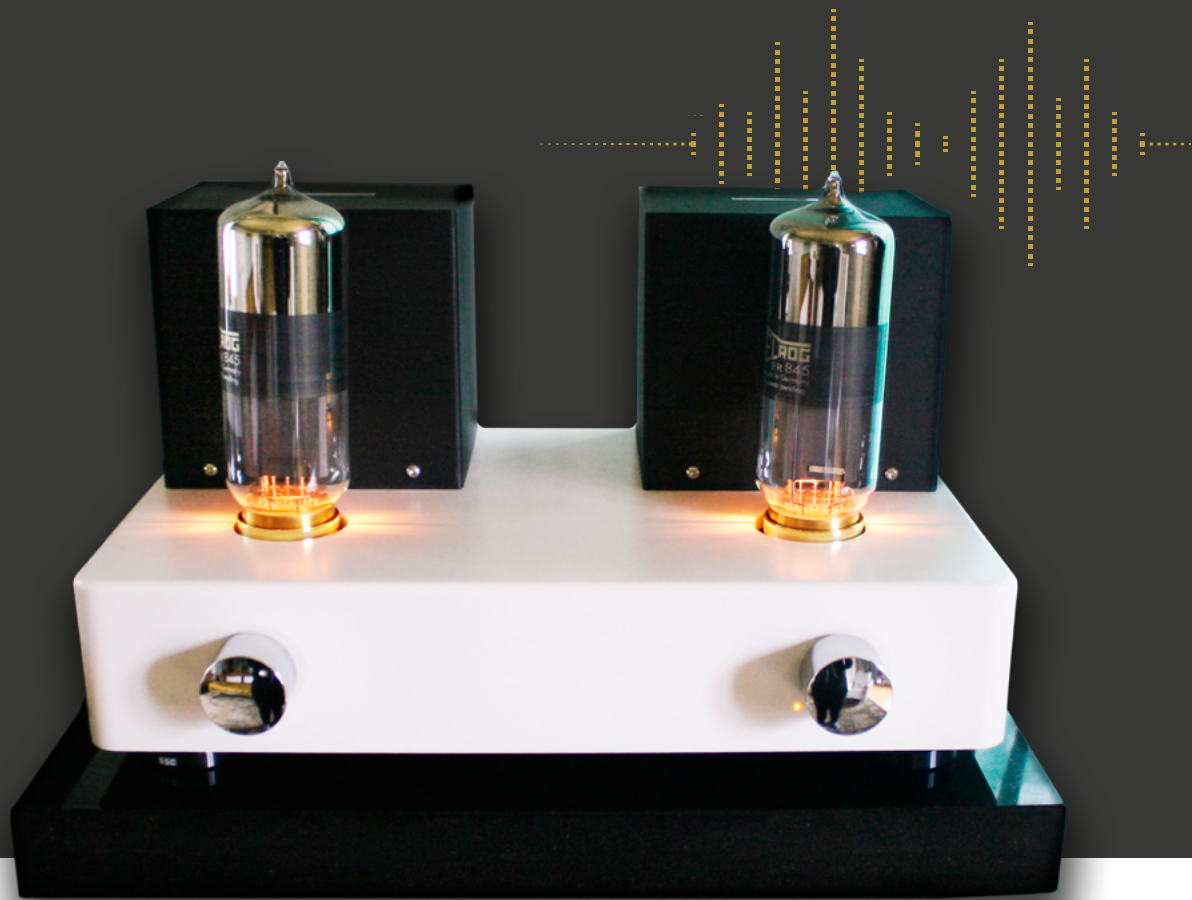

PARAMETER AURORA 20 MK II

distortion factor at 1W, 10W, 20W and 1kHz and 4Ohm: 0.4%, 0.8%, 1%
maximum continuous sine power at 4ohms and $k=1\%$: 2x 20W
signal-to-noise ratio at 50mW: 86dB
signal-to-noise ratio at 10W: 95dB
channel separation right channel-left channel at 1kHz: 70dB
attenuation factor at 4 ohms: 8
frequency response: 30Hz (-0.1dB) -39kHz (-3dB)

input impedance: 47kOhm
tube configuration: 2x KR T100 or 2x 845
number of inputs: 1
Input sensitivity for full scale: 0.8V RMS
power consumption at idle: 450VA
dimensions and weight: 470x320x190 mm; ca. 40kg